


# Digital ID Solution

---

BROCHURE | SOLUTION OVERVIEW

REV00

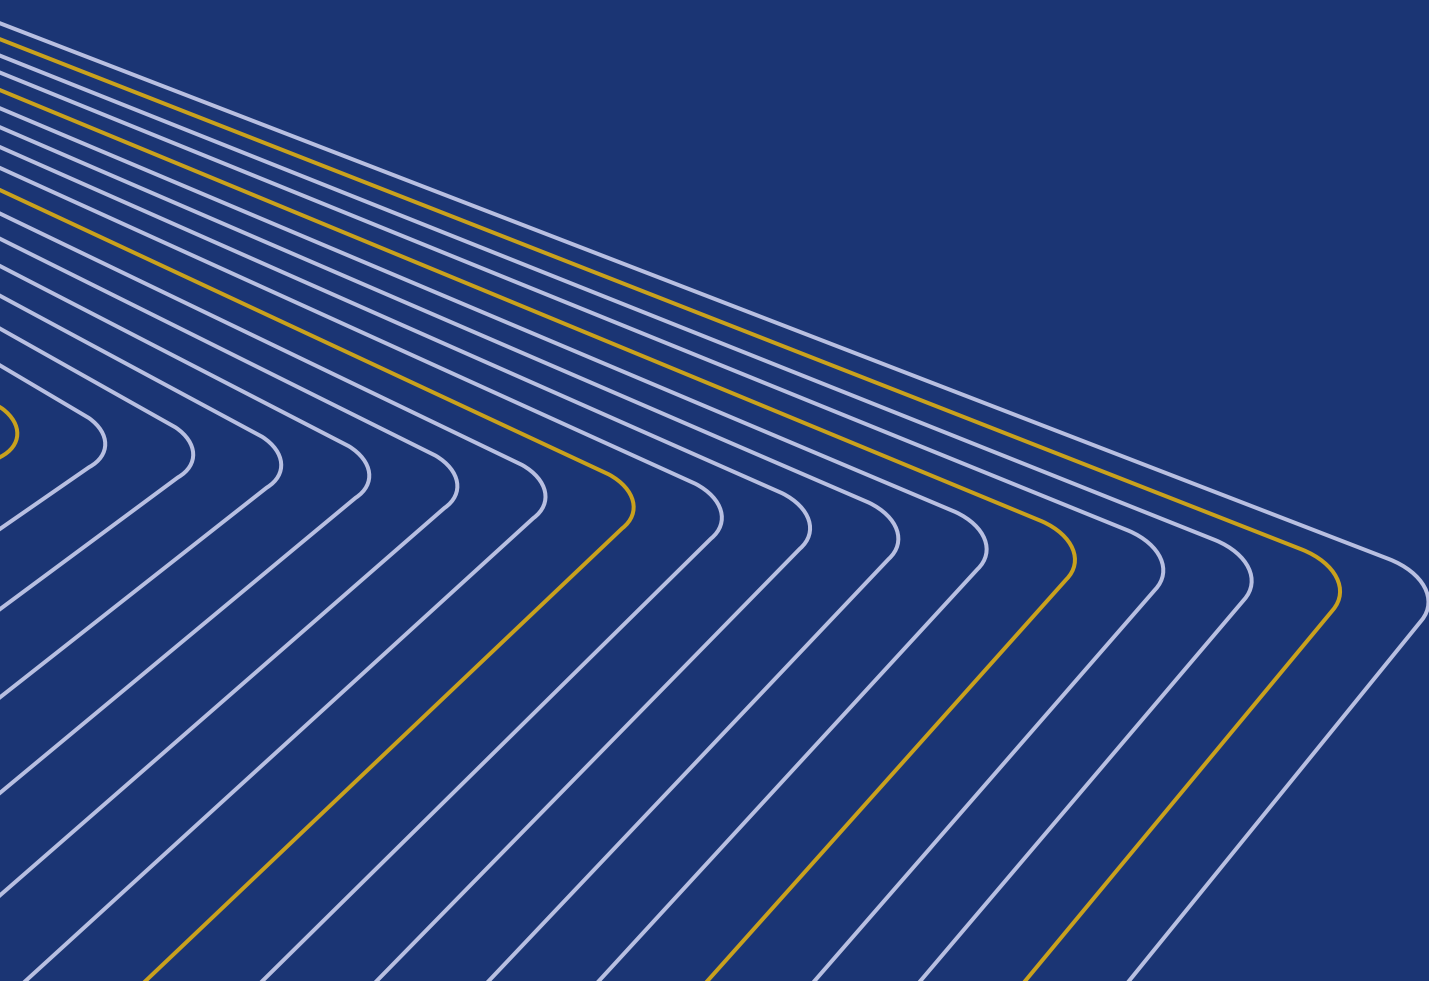



# Core values for customers

2017

Established

1 000+

Trusted Partners

130+

Countries of  
Scanner Client

75+

Government Projects

40+

Patents and  
Intellectual Property Rights

## AI-driven Algorithm

Artificial Intelligence (AI) engines built into all products and algorithmic technologies help solve problems faster and deliver high performance.

## Biometrics

By providing facial recognition, fingerprint, and palm print recognition with high convenience and security are applied to various industries.

## Liveness Detection

Our FBI-certified devices effectively prevent spoofing of fake fingerprints made of film, adhesive, rubber, clay, silicone, etc. In addition, AI technology can easily prevent authentication using a mask made with a 3D printer or a face made with silicon.

## Document Reading

It provides high-performance ID recognition technology with OCR, QR code, 1D & 2D barcode recognition technology used for eID, ePassport, driver's license, visa issuance, and boarding ticket checks.

# Comprehensive technology application portfolio

## Citizen ID

Border control and travel  
Driving license issuance  
ePassport issuance  
National ID  
Pension distribution  
Voter registration

## Finance

ATM / POS integration  
Access management  
Bank account opening

## Telecom

SIM card registration

## Workforce Management

Time attendance


## Law Enforcement

Criminal identification



# Leader by market share

Xperix's products are used globally for automated border control, VISA and ePassport issuance, digital ID issuance, voter registration, SIM card issuance, criminal identification, self-service kiosk, and more.

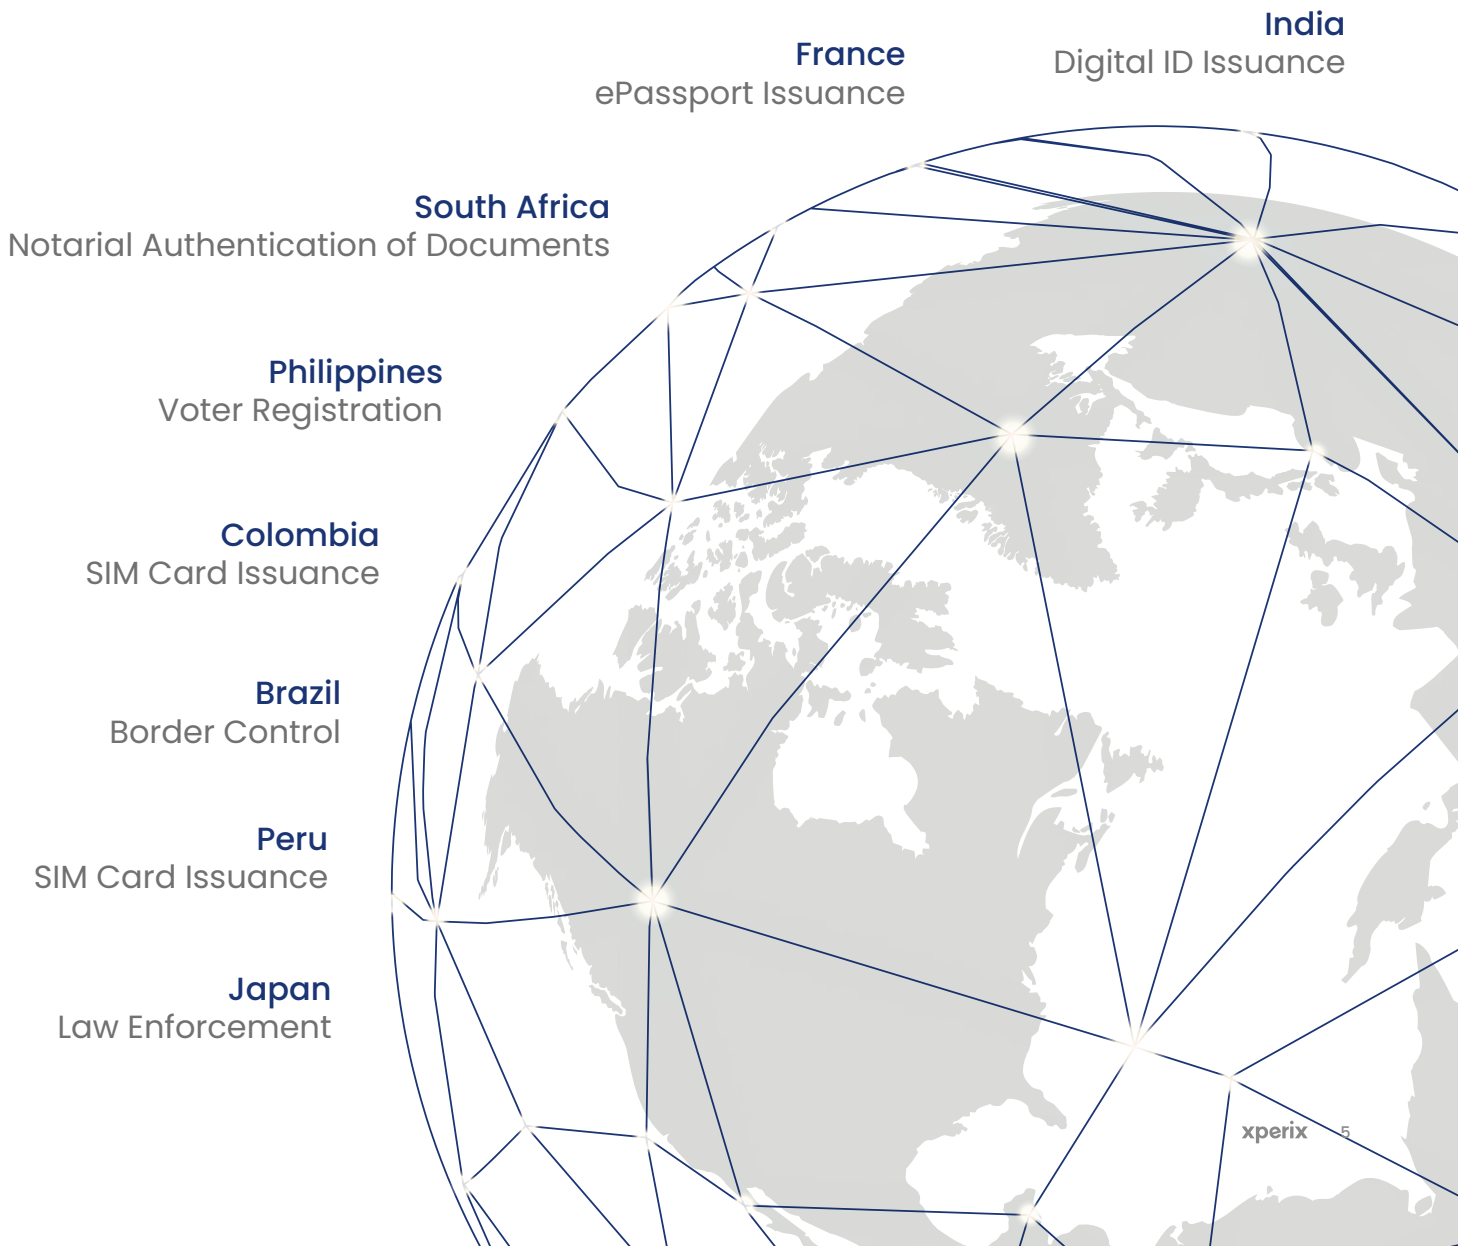

Powerful products.  
Expand what's possible.





xperix

xperix



# RealScan S60

World's First FAP60 Live Scanner has obtained PAD Level 2 & 1 Standards



Embedded Module: RealScan S60M

 **BixeLab**  
ISO 30107-3 Compliant


 **MOSIP**  
COMPLIANT

RealScan S60 is the FBI Appendix F certified, FAP60, Ultra Slim, and Lightweight fingerprint live scanner. RealScan S60 provides advanced artificial intelligence-based live finger detection technology compliant with ISO/IEC 30107-3 PAD Level 1 & 2 Standard. Applying LFD technology, RealScan S60 distinguishes fake fingerprints made from various materials, including clay, rubber, silicon, glue, paper, film, and more.

With Xperix's proprietary fingerprint algorithm and an advanced TFT (Thin Film Transistor)-optical technology, RealScan S60 enables capture of the highest fingerprint image quality flat and rolled fingers with little effect from various fingerprint conditions. Due to the small and thin form factor, it is optimized for desktop solutions and easy integration into portable devices, providing a significant advantage for customers to maximize the benefit from their product and solution.

## — Features

- FBI Appendix F & Mobile ID **FAP 60** Certified
- Flat (Four, Two, Single) and Rolled (Single) fingerprints capturing
- **Advanced TFT Optical Technology**
- Ingress Protection IP65
- Optimized for easy integration
- AI-based Liveness Detection (Compliant with **ISO/IEC 30107-3 PAD Level 1 & 2 Standard**)
- **Advanced Rolled Image Construction Technology**
- **Windows, Linux, and Android support**

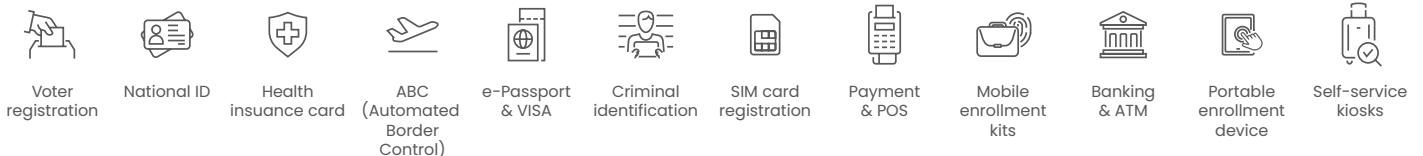

# RealScan-G10

Iconic FAP60 Live Scanner



RealScan-G10 is the FBI Appendix F certified, FAP60, and the iconic live scanner for enrollment. Xperix's advanced optical technology guarantees high-speed image capturing and seamless image processing without being affected by the dry/wet finger or any environment.

With its proven fingerprint algorithm, RealScan-G10 distinguishes fake fingerprints and captures the highest fingerprint image quality flat and rolled fingers. RealScan-G10 is the perfect live scanner for citizen ID and various applications.

## Features

- FBI Appendix F & Mobile ID **FAP 60** Certified
- Flat(Four, Two, Single) and Rolled(Single) fingerprints capturing
- Ingress Protection **IP54**
- **Voice Instruction**
- Optimized for easy integration
- AI-based Liveness Detection (Compliant with **ISO/IEC 30107-3 PAD Level 1 & 2** Standard)
- **Advanced Rolled Image Construction Technology**
- **Windows, Linux, and Android support**



Voter registration



National ID



Health insurance card



ABC (Automated Border Control)



e-Passport & VISA



Criminal identification



SIM card registration



Payment & POS



Mobile enrollment kits



Banking & ATM



Portable enrollment device



Self-service kiosks



# RealScan-FC

## Palmprint & Tenprint Live Scanner



RealScan-FC is an all-in-one palmprint live scanner for capturing various types of fingerprints and palmprints, including slaps, flats, rolls, palms, and writer's palms. Featuring Xperix's cutting-edge optical & biometric technologies, it is capable of capturing the highest quality images regardless of the physical condition of hands.

RealScan-FC supports user-friendly features like voice instruction, foot switches, and a mobile power supply. With the proven reliability of FBI certification, RealScan-FC is a perfect fit for criminal identification.

### — Features

- **FBI Appendix F & Appendix P Certified**
- Flat(Four, Two, Single) and Rolled(Single) fingerprints capturing
- Upper & Lower, writer's palmprints capturing
- Scan 4-finger combined print and palms under fingers up to 5" x 5"
- Scan rotated fingerprints up to 1.6" x 1.6"
- Scan full palmprint up to 4.5" x 3", rotated and flat fingerprints up to 5"x 1.6"
- Ingress Protection **IP64**
- Slippage detection for flats and rolls
- Ghost image elimination
- Optimized for easy integration
- AI-based Liveness Detection
- **Advanced Rolled Image Construction Technology**
- **Windows, Linux, and Android support**



National ID



e-Passport  
& VISA



Criminal  
identification



Civil  
identification



Airport & Border  
Check



Background  
Check

# RealScan-D

Portable Dual Finger  
Live Scanner



RealScan-D is the FBI Appendix F certified, FAP45, single/dual fingerprint live scanner. Its proven fingerprint algorithm, RealScan-D captures the flat and roll fingerprint at an extremely fast frame rate. All the leading technology resides in a sleek and ergonomic design and a user-friendly interface that makes it credibly simple to use with minimum training and maintenance.

## — Features

---

- FBI Appendix F & Mobile ID **FAP45** Certified
- Flat(Two, Single) and Rolled(Single) fingerprints capturing
- Ingress Protection **IP53**
- Optimized for easy integration
- AI-based Liveness Detection
- **Advanced Rolled Image Construction Technology**
- **Windows, Linux, and Android support**



Voter registration



National ID



Health insurance card



e-Passport & VISA



Criminal identification



SIM card registration



Mobile enrollment kits



Banking & ATM

# BioMini Slim 3

Ultra-slim FAP30 Single Fingerprint Scanner

## Embedded Module: BM-Slim3

BioMini Slim 3 is the ultra-slim FAP30 single fingerprint scanner. Along with its 15 mm slim optical sensor, it features Xperix's proprietary Multi-dynamic Range(MDR) technology, MINEX III compliance, and Android device support. BioMini Slim 3 also provides developers with more physical flexibility with its reduced form factor, and the ultra-slim optical sensor ensures robust operation over time.

With Xperix's proprietary fingerprint algorithm, BioMini Slim 3 distinguishes fake fingerprints made from various materials, including clay, rubber, silicon, glue, paper, film, and more. It reliably operates under direct sunlight and captures high-quality fingerprint images when the finger is dry or wet.

## — Features

- **FBI PIV & Mobile ID FAP30 Certified**
- Capturing high-quality fingerprint images when the finger is dry / wet
- **Operates under direct sunlight (up to 100 000 LUX)**
- Enhanced security (on-device encryption of fingerprint templates & supporting security protocols)
- **Standalone operation**
- Ingress Protection **IP65**
- Optimized for easy integration
- AI-based Liveness Detection
- **True Plug-n-Play**
- **Windows, Linux, and Android support**



Voter verification



National ID



Health insurance card



Criminal identification



SIM card registration



Payment & POS



Civil identification



Banking & ATM



Portable enrollment device

# BioMini Slim 2/2S

Ultra-slim FAP20 Single Fingerprint Scanner



Embedded Module: BM-Slim2, BM-Slim2S



ISO 30107-3 Compliant

BioMini Slim 2 is the ultra-slim FAP20 single fingerprint scanner. Along with its 13.5 mm slim optical sensor, it features Xperix's proprietary Multi-dynamic Range(MDR) technology, MINEX III compliance, and Android device support. BioMini Slim 2 also provides developers with more physical flexibility with its reduced form factor, and the ultra-slim optical sensor ensures robust operation over time.

With Xperix's proprietary fingerprint algorithm, BioMini Slim 2 provides advanced artificial intelligence-based live finger detection technology compliant with ISO/IEC 30107-3 PAD Level 1 & 2 Standard. Applying LFD technology, BioMini Slim 2 distinguishes fake fingerprints made from various materials, including clay, rubber, silicon, glue, paper, film, and more. It reliably operates under direct sunlight and captures high-quality fingerprint images when the finger is dry or wet.

## — Features

- **FBI PIV & Mobile ID FAP20 Certified**
- Capturing high-quality fingerprint images when the finger is dry / wet
- **Operates under direct sunlight (up to 100 000 LUX)**
- Enhanced security (on-device encryption of fingerprint templates & supporting security protocols)
- **Standalone operation** (BioMini Slim 2S Only)
- Ingress Protection **IP65**
- Optimized for easy integration
- AI-based Liveness Detection (Compliant with **ISO/IEC 30107-3 PAD Level 2 & 1 Standard**)
- **True Plug-n-Play**
- **Windows, Linux, and Android support**



Voter verification



National ID



Health insurance card



Criminal identification



SIM card registration



Payment & POS



Civil identification



Banking & ATM



Portable enrollment device

# BioMini Combo 2

FAP20 Single Fingerprint and Smartcard Scanner



**Embedded Module: BM-Slim2**

BioMini Combo 2 is the FBI FAP 20 and PIV certified two-factor authentication scanner with machine learning-based Live Finger Detection(LFD) technology. This innovative product offers unmatched protection using advanced anti-spoofing techniques to prevent fake fingers from clay, rubber, silicone, glue, paper, film, and more. Furthermore, it provides an additional layer of security with SAM(Secure Access Module) slot. Designed for indoor and outdoor use, the BioMini Combo 2 captures fingerprints under 100,000 Lux direct sunlight and with water and dustproof IP65 protection. Compatible with Windows and Linux operating systems, the BioMini Combo 2 offers versatility and flexibility for various applications.

## — Features

- **FBI PIV & Mobile ID FAP20 Certified**
- Capturing high-quality fingerprint images when the finger is dry / wet
- **Operates under direct sunlight (up to 100 000 LUX)**
- **Standalone operation**
- Ingress Protection **IP65**
- Optimized for easy integration
- AI-based Liveness Detection (Embedded BM-Slim2 Module)
- **True Plug-n-Play**
- **Windows, Linux, and Android support**



Voter verification



National ID



Health insurance card



Criminal identification



SIM card registration



Payment & POS



Civil identification



Banking & ATM



Portable enrollment device



# RealPass-N

Multi-functional & Full-page Document Reader



RealPass-N is a multi-functional and full-page document reader for one-step reading of multiple document types, including ICAO standard documents such as e-Passport, e-Visa, ID cards, and 1D & 2D barcodes. It is designed to capture or extract data from visual data pages and RFID chips of electronic documents quickly and reliably in a variety of public and commercial sectors.

## — Features

- ICAO Doc 9303 Standard Compliance
- One-step reading of visual data page and RFID chip of e-documents
- OCR data capture of the Machine-Readable Zone(MRZ)
- Reads ISO14443 Type A/B contactless chip, 1D/2D Barcodes
- Automatic detection of document placement
- No moving parts, robust, minimal maintenance cost
- Windows and Linux support



Airport



Passport & VISA Issuance



Border Control



Duty-Free Shop



Casino



Hotel



Travel Agency



Car Rental



Currency Exchange





# Specifications

	RealScan S60	RealScan S60M
Capture	Flat(Four/Two/Single) and Rolled(Single) fingers	Flat(Four/Two/Single) and Rolled(Single) fingers
Sensor Type	Optical TFT	Optical TFT
Resolution	500 ppi	500 ppi
Grayscale	8-bit, 256 levels	8-bit, 256 levels
Image Size (WxL)	Four finger slap: 1600 x 1500 pixels Two finger flat: 900 x 900 pixels Single flat / Roll: 800 x 750 pixels	Four finger slap: 1600 x 1500 pixels Two finger flat: 900 x 900 pixels Single flat / Roll: 800 x 750 pixels
Template Format	Xperix, ISO 19794-2, ANSI 378	Xperix, ISO 19794-2, ANSI 378
Supported Image Formats	RAW, BMP, WSQ, JPEG2000	RAW, BMP, WSQ, JPEG2000
Encryption	AES-256	AES-256
FBI / Image Certifications	Identification Flats(Appendix F), Live-Scan (Tenprint) System(Appendix F), Mobile ID FAP60 (Appendix F)	Identification Flats(Appendix F), Live-Scan (Tenprint) System(Appendix F), Mobile ID FAP60 (Appendix F)
OS Support	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (Custom 4.0)	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (Custom 4.0)
Weight	220 g	189 g
Platen Size (WxL)	83.3 mm x 78.2 mm	83.3 mm x 78.2 mm
Sensing Area (WxL)	81.3 mm x 76.2 mm	81.3 mm x 76.2 mm
Dimensions (WxLxH)	118 mm x 120 mm x 19.3 mm	102.4 mm x 112 mm x 15.9 mm
Surface Protection	Optic Glass and AR Coating	Optic Glass and AR Coating
Ingress Protection	IP65 (Sealed between bezel and sensor surface)	IP65 (Sealed between bezel and sensor surface)
Operating Temperature	-10 °C - 55 °C	-10 °C - 55 °C
Operating Humidity	10% - 90%, non-condensing	10% - 90%, non-condensing
Storage Temperature	-20 °C - 80 °C	-20 °C - 80 °C
Interface	USB 2.0 High Speed, USB-C	USB 2.0 High Speed, USB-C
Power Source	USB Host	USB Host
USB Voltage Level	5.0 V ±10%	5.0 V ±10%
Live Finger Detection (LFD)	Supported (ISO/IEC 30107-3 compliant)	Supported (ISO/IEC 30107-3 compliant)
Sound	Buzzer	Buzzer
LED Indicator	Supported	Supported
Kensington Lock	Not Supported	Not Supported
Smart Sleep Mode	Supported	Supported
Certification	FBI, CE, FCC, KC, RoHS, USB-IF, IEC 62471, WEEE, REACH, WHQL, UL	FBI, CE, FCC, KC, RoHS, USB-IF, IEC 62471, WEEE, REACH, WHQL, UL

RealScan-G10	RealScan-D	RealScan-FC
Flat(Four/Two/Single) and Rolled(Single) fingers	Flat(Two/Single) and Rolled(Single) fingers	Upper & Lower Palms, Writer's palms, Flat(Four/Two/Single) and Rolled(Single) fingers
Optical	Optical	Optical
500 ppi	500 ppi	500 ppi
8-bit, 256 levels	8-bit, 256 levels	8-bit, 256 levels
Four finger slap: 1600 x 1500 pixels Single flat / Roll: 800 x 750 pixels	Two finger flat: 900 x 900 pixels Single flat / Roll: 900 x 900 pixels	Palm print: 2500 x 2500 pixels Four finger slap: 1600 x 1500 pixels Single flat / Roll: 800 x 750 pixels
Xperix, ISO 19794-2, ANSI 378	Xperix, ISO 19794-2, ANSI 378	Xperix, ISO 19794-2, ANSI 378
RAW, BMP, WSQ, JPEG2000	RAW, BMP, WSQ, JPEG2000	RAW, BMP, WSQ, JPEG2000
AES-256 by Image SDK	AES-256	AES-256
Identification Flats(Appendix F), Live-Scan (Tenprint) System(Appendix F), Mobile ID FAP60 (Appendix F)	Mobile ID FAP45 (Appendix F), PIV Single Finger (PIV-071006)	Identification Flats(Appendix F & Appendix P), Live-Scan (Tenprint) System (Appendix F), Live-Scan (Palm) system (Appendix P)
Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (Custom 4.0)	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit,
1.8 kg	540 g	5.26 kg
89 mm x 80 mm	48 mm x 48 mm	131.2 mm x 130.2 mm
81.3 mm x 76.2 mm	46 mm x 46 mm	127 mm x 127 mm
152 mm x 152 mm x 127 mm	84 mm x 171 mm x 63 mm	193 mm x 315 mm x 150 mm
Optic Glass (Scratch free)	Optic Glass (Scratch free)	Optic Glass (Scratch free)
IP54 (Sealed between bezel and sensor surface)	IP53 (Sealed between bezel and sensor surface)	IP64 (Sealed between bezel and sensor surface)
-10 °C - 55 °C	-10 °C - 50 °C	-10 °C - 55 °C
10% - 90%, non-condensing	10% - 90%, non-condensing	10% - 90%, non-condensing
-20 °C - 70 °C	-20 °C - 70 °C	-20 °C - 70 °C
USB 2.0 High Speed	USB 2.0 High Speed	USB 2.0 High Speed
USB Host	USB Host	USB Host / Adapter
5.0 V ±10%	5.0 V ±10%	5.0 V ±10% / 12 VDC ±10%
Supported	Supported	Not Supported
Speaker	Buzzer	Speaker
Supported	Supported	Not Supported
Supported	Not Supported	Not Supported
Not Supported	Not Supported	Not Supported
FBI, CE, FCC, KC, RoHS, USB-IF, IEC 62471, WEEE, REACH, WHQL, UL, BIS, STQC	FBI, CE, FCC, KC, UL, WHQL	FBI, CE, FCC, KC, RoHS, WEEE, REACH, WHQL, UL, BIS



# Specifications

	BioMini Slim 3	BioMini Slim 2/2S
Capture	Flat(Single) fingers	Flat(Single) fingers
Sensor Type	Optical	Optical TFT
Resolution	500 ppi	500 ppi
Grayscale	8-bit, 256 levels	8-bit, 256 levels
Image Size (WxL)	400 x 500 pixels	300 x 400 pixels
Template Format	Xperix, ISO 19794-2, ANSI 378	Xperix, ISO 19794-2, ANSI 378
Supported Image Formats	RAW, BMP, ISO 19794-4, WSQ	RAW, BMP, WSQ, JPEG2000
Encryption	Device: AES-256, RSA 1024bit, ECC 521bit SDK: AES-256	Device: AES-256, RSA 1024bit, ECC 521bit (BioMini Slim 2S Only) SDK: AES-256
FBI / Image Certifications	Mobile ID FAP 30(PIV-071006), PIV Single Finger(PIV-071006)	Mobile ID FAP 20(PIV-071006), PIV Single Finger(PIV-071006)
OS Support	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (USB Host), Standalone Operation	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (USB Host) Standalone Operation (BioMini Slim 2S Only)
Weight	111 g	91 g
Platen Size (WxL)	21.5 mm x 26.5 mm	16.5 mm x 21 mm
Sensing Area (WxL)	20.3 mm x 25.4 mm	15.2 mm x 20.3 mm
Dimensions (WxLxH)	83 mm x 45.9 mm x 20 mm	72.8 mm x 40.7 mm x 18.5 mm
Surface Protection	Optic Glass (Scratch free)	Optic Glass (Scratch free)
Ingress Protection	IP65 (Sealed between bezel and sensor surface)	IP65 (Sealed between bezel and sensor surface)
Operating Temperature	-10 °C - 50 °C	-10 °C - 50 °C
Operating Humidity	10% - 90%, non-condensing	10% - 90%, non-condensing
Storage Temperature	-20 °C - 70 °C	-20 °C - 70 °C
Interface	USB 2.0 High Speed	USB 2.0 High Speed, USB-C
Power Source	USB Host	USB Host
USB Voltage Level	5.0 V ±10%	5.0 V ±10%
Live Finger Detection (LFD)	Supported	Supported (ISO/IEC 30107-3 compliant)
Plug & Play	Supported (by HID Protocol)	Buzzer
Standalone Mode	Supported	Supported (BioMini Slim 2S Only)
Multi Dynamic Range (MDR)	Supported	Supported
Smart Sleep Mode	Supported	Supported
Certification	FBI, CE, FCC, KC, RoHS, USB-IF, CB, IEC 62471, WEEE, REACH, BIS, WHQL	FBI, CE, FCC, KC, RoHS, USB-IF, IEC 62471, WEEE, REACH, WHQL, UL

BM-Slim3	BM-Slim2/2S
Flat(Single) fingers	Flat(Single) fingers
Optical	Optical TFT
500 ppi	500 ppi
8-bit, 256 levels	8-bit, 256 levels
400 x 500 pixels	300 x 400 pixels
Xperix, ISO 19794-2, ANSI 378	Xperix, ISO 19794-2, ANSI 378
RAW, BMP, ISO 19794-4, WSQ	RAW, BMP, WSQ, JPEG2000
Device: AES-256, RSA 1024bit, ECC 521bit	Device: AES-256, RSA 1024bit, ECC 521bit (BioMini Slim 2S Only)
SDK: AES-256	SDK: AES-256
Mobile ID FAP 30(PIV-071006), PIV Single Finger(PIV-071006)	Mobile ID FAP 20(PIV-071006), PIV Single Finger(PIV-071006)
Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (USB Host), Standalone Operation	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (USB Host) Standalone Operation (BioMini Slim 2S Only)
48.6 g	30 g
21.5 mm x 26.5 mm	16.5 mm x 21 mm
20.3 mm x 25.4 mm	15.2 mm x 20.3 mm
67.5 mm x 36 mm x 15 mm	59 mm x 32 mm x 13.5 mm
Optic Glass (Scratch free)	Optic Glass (Scratch free)
IP65 (Sealed between bezel and sensor surface)	IP65 (Sealed between bezel and sensor surface)
-10 °C - 50 °C	-10 °C - 50 °C
10% - 90%, non-condensing	10% - 90%, non-condensing
-20 °C - 70 °C	-20 °C - 70 °C
USB 2.0 High Speed	USB 2.0 High Speed, USB-C
USB Host	USB Host
5.0 V ±10%	5.0 V ±10%
Supported	Supported (ISO/IEC 30107-3 compliant)
Supported (by HID Protocol)	Buzzer
Supported	Supported (BioMini Slim 2S Only)
Supported	Supported
Supported	Supported
FBI, CE, FCC, KC, RoHS, USB-IF, CB, IEC 62471, WEEE, REACH, BIS, WHQL	FBI, CE, FCC, KC, RoHS, USB-IF, IEC 62471, WEEE, REACH, WHQL, UL

# Specifications

	BioMini Combo 2
Capture	Flat(Single) fingers
Sensor Type	Optical
Resolution	500 ppi
Grayscale	8-bit, 256 levels
Image Size (WxL)	300 x 400 pixels
Template Format	Xperix, ISO 19794-2, ANSI 378
Supported Image Formats	RAW, BMP, ISO 19794-4, WSQ
Encryption	SDK: AES-256
FBI / Image Certifications	Mobile ID FAP 20(PIV-071006), PIV Single Finger(PIV-071006)
OS Support	Windows 7 or later 32/64bit, Linux OpenSUSE, Fedora, Ubuntu, CentOS, Debian 32/64bit, Android 5.0 or later (USB Host)
Weight	280 g
Platen Size (WxL)	16.5 mm x 21 mm
Sensing Area (WxL)	15.2 mm x 20.3 mm
Dimensions (WxLxH)	95.7 mm x 114.8 mm x 52.6 mm
Surface Protection	Optic Glass (Scratch free)
Ingress Protection	IP65 (Sealed between bezel and sensor surface)
Operating Temperature	-10 °C - 50 °C
Operating Humidity	10% - 90%, non-condensing
Storage Temperature	-20 °C - 70 °C
Interface	USB 2.0 High Speed, CCID, PC/SC driver
Power Source	USB Host
USB Voltage Level	5.0 V ±10%
Live Finger Detection (LFD)	Supported (Embedded BM-Slim2 module)
Plug & Play	Not Supported
Standalone Mode	Not Supported
Multi Dynamic Range (MDR)	Supported
Smart Sleep Mode	Not Supported
Certification	FBI, CE, FCC, KC, RoHS, USB-IF, WHQL, UL
SAM Slot	Supported (1 slot)
Contact Card	ISO 7816 Class A/B/C (5V, 3.0V, 1.8V) T=0 and T=1, EMV2000 contact smart card with SAM Slot (Optional)

	RealPass-N	
Model Name	RPN-BQ	RPN-FQ
Capture	Passport, ID Card, Driver licence, QR code, Barcode	ePassport, ID Card, Driver licence, QR code, Barcode
Sensor Type	Optical	Optical
Resolution	500 ppi	500 ppi
Image Color Depth	24-bit/pixels	24-bit/pixels
Image Size (WxL)	2560 x 1772 pixels	2560 x 1772 pixels
Illuminations	White, IR, UV	White, IR, UV
Supported Image Formats	BMP, JPG, PNG, JPEG2000, TIFF	BMP, JPG, PNG, JPEG2000, TIFF
OCR	ICAO DOC 9303(ISO-7510) compliant travel documents(2 & 3-line MRZ) ISO-18013 driving licenses (1-line MRZ) Korean ID Card(National ID Card, Driver license)	ICAO DOC 9303(ISO-7510) compliant travel documents(2 & 3-line MRZ) ISO-18013 driving licenses (1-line MRZ) Korean ID Card(National ID Card, Driver license)
Barcode 1D	BC412, Codabar, Code 11, Code 32, Code 39, Code 93, Code 128 GS1 DataBar (RSS), Hong Kong 2 of 5, IATA 2 of 5, Interleaved 2 of 5, Plessey Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Straight 2 of 5, Telepen, Trioptic, UPC/EAN/JAN	BC412, Codabar, Code 11, Code 32, Code 39, Code 93, Code 128 GS1 DataBar (RSS), Hong Kong 2 of 5, IATA 2 of 5, Interleaved 2 of 5, Plessey Matrix 2 of 5, MSI Plessey, NEC 2 of 5, Straight 2 of 5, Telepen, Trioptic, UPC/EAN/JAN
Barcode 2D	PDF 417, QR Code, QR Code Model 1, Micro QR Code Aztec, DataMatrix, Grid Matrix, Dot Code, Han Xin, Maxicode	PDF 417, QR Code, QR Code Model 1, MicroQR Code Aztec, DataMatrix, Grid Matrix, Dot Code, Han Xin, Maxicode
RFID	Not Supported	ISO 14443 A/B Type (up to 848Kbps) including BAC, PA, AA, EAC, PACE and SAC, PC/SC support
OS Support	Windows 7 or later 32/64bit, Linux Ubuntu and CentOS 32/64bit	Windows 7 or later 32/64bit, Linux Ubuntu and CentOS 32/64bit
Weight	1 kg	1 kg
Sensing Area (WxL)	130 mm x 90 mm	130 mm x 90 mm
Dimensions (WxLxH)	155 mm x 190 mm x 99.8 mm	155 mm x 190 mm x 99.8 (device) / 103.8 (guide) mm
Surface Protection	Tempered Glass (Scratch free)	Tempered Glass (Scratch free)
Ingress Protection	IP54 (Sealed between bezel and sensor surface)	IP54 (Sealed between bezel and sensor surface)
Operating Temperature	-10 °C - 50 °C	-10 °C - 50 °C
Operating Humidity	10% - 90%, non-condensing	10% - 90%, non-condensing
Storage Temperature	-20 °C - 80 °C	-20 °C - 80 °C
Interface	USB 2.0 High Speed, Integrated USB 3.0 Hub 2 ports	USB 2.0 High Speed, Integrated USB 3.0 Hub 2 ports
Power Source	USB Host / Adapter	USB Host / Adapter
USB Voltage Level	5.0 V ±10% / 12 VDC ±10%	5.0 V ±10% / 12 VDC ±10%
Sound	Buzzer	Buzzer
LED Indicator	Supported	Supported
Kensington Lock	Supported	Supported
Certification	CE, FCC, KC, WEEE, RoHS, REACH	CE, FCC, KC, WEEE, RoHS, REACH



**xperix**

**Xperix Inc.**

#1207, 37, Sagimakgol-ro 62beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13211, Republic of Korea  
Inquiry: [sales\\_id@xperix.com](mailto:sales_id@xperix.com) | [www.xperix.com](http://www.xperix.com)

©2024 Xperix Inc. Xperix and identifying product names and numbers herein are registered trade marks of Xperix Inc. All non-Xperix brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [REV00.240202]