


BM-Slim3

Ultra-slim FAP30 Standalone
Authentication Module



BM-Slim3 is a FBI PIV and Mobile ID FAP30 Certified* fingerprint module that provides a number of industry-leading features under its sleek design. Featuring range-leading powerful 1.0Ghz CPU, BM-Slim3 provides high-speed extraction and matching of fingerprints on device. BM-Slim3 also supports true plug-n-play by featuring HID(human interface device) protocol and Suprema's proprietary Multi-dynamic Range(MDR) technology. BM-Slim3 provides new and advanced Live Finger Detection(LFD)technology by applying a machine learning method based AI(Artificial Intelligence) as a World-class Trained Inspector which can be upgradeable.

(*in preparation)

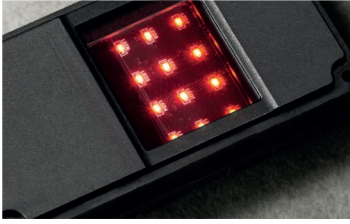

BM-Slim3

Ultra-slim FAP30 Standalone Authentication Module

FEATURES



- True plug-n-play operation
- HID(human interface device) protocol



- Standalone operation
- 1.0GHz MIPS-base Xburst Core CPU
- On-device fingerprint extraction and matching
- O/S independent fingerprint scanner



- Enhanced Security
- On-device template encryption
- On-device template extraction



- World's slimmest FAP 30 optical sensor



- FBI PIV/FIPS201 and FBI Mobile ID FAP 30 certificates*
- Image compression standard: WSQ



- Capturing high-quality fingerprint images even when the finger is dry & wet.
- Operates under direct sunlight up to 100,000 LUX



- Live Fingerprint Detection (LFD) Technology
- Distinguishes fake fingerprints made from various materials including clay, rubber, silicon, glue, paper, film and more



- Automated power saving by smart sleep mode

SPECIFICATIONS

	Image Quality Standards	FBI PIV / FBI Mobile ID FAP30 compliant
Sensor	Sensor Type	Optical
	Resolution	500 ppi
	Gray Scale	256 level
	Platen Size	21.5 x 26.5 (W x L mm)
	Sensing Area	20.32 x 25.4 (W x H mm)
	Image Size	400 x 500 (W x H pixels)
H/W	Interface	USB 1.1 or Higher
	Operating Temperature	-10~50 °C
	Operating humidity	10 ~ 90% RH
	Ingress Protection	IP65 (Sensor Surface)
	Dimensions (W x L x H mm)	67.5 x 36 x 15
	Weight	48.6g
S/W	Operating System	OS/Platform Independent, Stand-Alone Operation
	Image Fomat	RAW, BMP, WSQ, ISO 19794-4
	Template Type	Suprema, ISO19794-2, ANSI-378
	LFD	O
Certification	CE*, FCC*, KC*, CB*, IEC62471*, WEEE*, WHQL*	

(*in preparation)

Suprema
SECURITY & BIOMETRICS

Suprema ID Inc.

#305~308, 3F, Building A, Tera Tower 2, 201 Songpa-daero, Songpa-gu, Seoul, Republic of Korea
T +82 31 710 5629 **E** sales_id@supremainc.com **www.suprema-id.com**

©2022 Suprema ID Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema ID Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [SUPREMAID-DHL-BM-S3-EN-REV04]